



Free space for maintenance



n: Number of holes

Body Material:	AISI 304
Screen Material:	AISI 316
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During back-flush:	2 bar
Max. Operating Temperature:	55 °C
Pressure Loss at Max. Flow Rate:	0.2 bar
Approximate back-flush Time:	40-60 sec. max.
Approximate back-flush Water Consumption:	300-400 lt./back-flush
Control System:	Hydraulic or Electrical

For high pressure, high temperature and different materials, custom made filters can be produced.

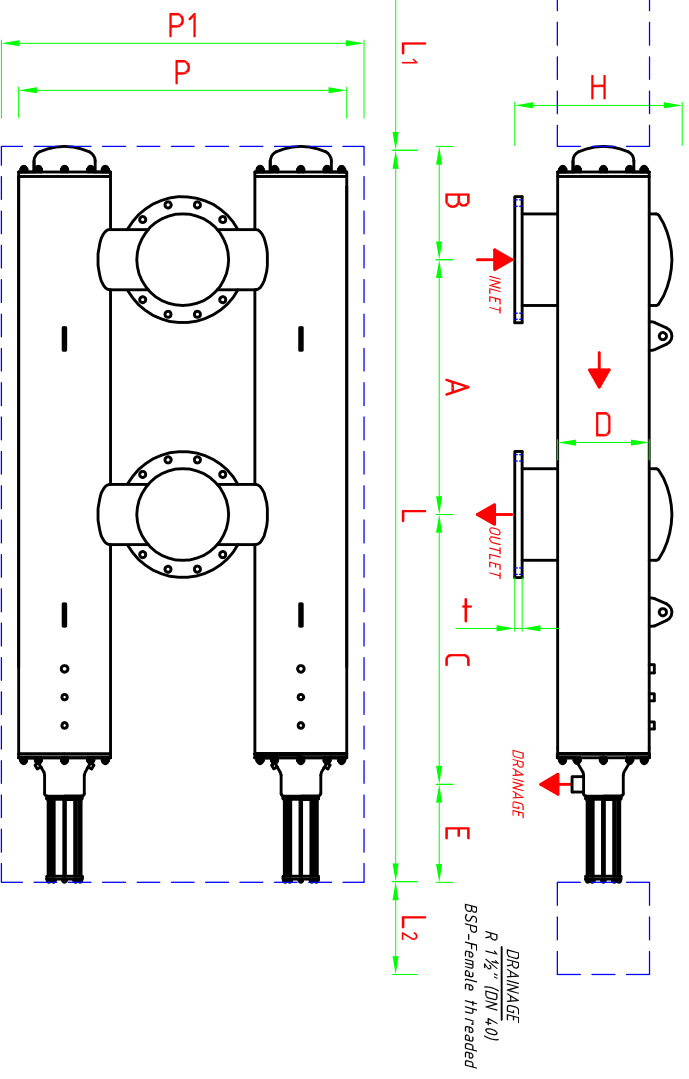

FILTER MODELS	INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576										A	L	L ₁	L ₂	B	C	E	D	H	P	P ₁	WEIGHT(kg)		MAX. FLOW RATE m ³ /h	SCREEN AREA cm ²
	inch	mm	D	T	K	d ₁	n	t	FULL	EMPTY																	
TWIN 210406	6	150	168.2	285	240	22	8	22	900	1968	1300	500	278	452	338	10"	430	1025	1825	510	210	200	8700				
TWIN 210606	6	150	168.2	285	240	22	8	22	900	2450	1700	500	319	893	338	10"	430	1025	1825	615	240	250	13000				
TWIN 210408	8	200	219.1	340	295	22	8	24	900	2052	1300	500	278	452	338	10"	490	1075	1875	525	220	320	8700				
TWIN 210608	8	200	219.1	340	295	22	8	24	900	2442	1700	500	315	889	338	10"	490	1075	1875	630	250	350	13000				
TWIN 212408	8	200	219.1	340	295	22	8	24	900	2052	1300	500	320	494	338	12"	515	1125	1925	580	250	380	8700				
TWIN 212608	8	200	219.1	340	295	22	8	24	900	2584	1700	500	386	960	338	12"	515	1125	1925	675	280	400	13000				
TWIN 212610	10	250	273.1	395	350	22	12	26	900	2584	1700	500	386	960	338	12"	540	1175	1975	695	290	500	13000				
TWIN 212612	12	300	323.9	445	400	22	12	26	900	2584	1700	500	386	960	338	12"	550	1225	2025	710	300	750	13000				
TWIN 212614	14	350	355.6	505	460	22	16	28	900	2584	1700	500	386	960	338	12"	610	1325	2125	750	330	1000	13000				

All dimensions are in millimeters.

Anel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.