
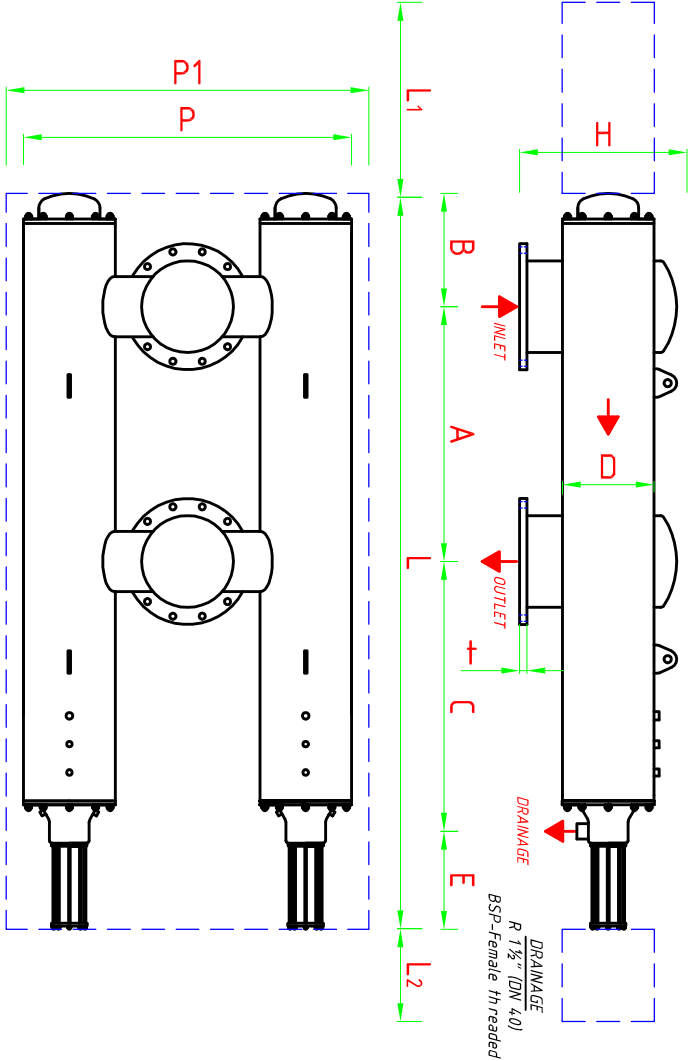


FILTERNOX TWIN 212614 FILTER LAYOUT AND DIMENSIONS

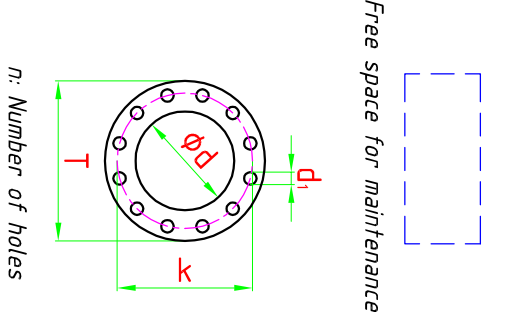

Body Material:	AISI 304
Screen Material:	AISI 316
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During back-flush:	2 bar
Max. Operating Temperature:	55 °C
Pressure Loss at Max. Flow Rate:	0.2 bar
Approximate back-flush Time:	40-60 sec. max.
Approximate back-flush Water Consumption:	300-400 lt/back-flush
Control System:	Hydraulic or Electrical

For high pressure, high temperature and different materials, custom made filters can be produced.

INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576																						
inch	mm	d	T	k	d ₁	n	t	A	L	L ₁	L ₂	B	C	E	D	H	P	P ₁	WEIGHT(kg)		MAX. FLOW RATE		SCREEN AREA	
																				FULL	EMPTY	m ³ /h	cm ²	
14	350	355.6	505	460	22	16	28	900	2584	1700	500	386	960	338	12"	610	1325	2125	750	330	1000	13000		

All dimensions are in millimeters.