

Short wave infrared emitters High speed and high power

Infrared heating technology

transfers large amounts of energy in a short time. Emitters are available for large surfaces, for three dimensional shapes and for small work pieces. By matching infrared emitters to individual applications, heating and drying processes can be integrated seamlessly into processing operations. In addition, infrared technology can be fitted with little expenditure into existing manufacturing lines.

Infrared emitters allow optimum matching

There are infrared emitters with various spectra. Short wave infrared radiation penetrates more deeply into materials, medium wave radiation is absorbed more strongly at the surface and into thin films. The wavelength at which infrared is emitted significantly influences the efficiency of the heating process. Perfectly matched infrared emitters can allow energy savings of up to 50 %.

Short wave infrared emitters

Short wave infrared radiation has high heating power. Short wave emitters are particularly suited for processes which need to be stopped and started very quickly, as they achieve their full operating efficiency within seconds. Infrared emitters are produced in proven and especially stable twin tube format. Twin tube emitters distinguish themselves with high radiation density and high power intensity. A gold reflector, fitted directly to the emitter, directs the infrared radiation onto the object to be heated. The efficiency compared with plate reflectors is significantly improved.

Heraeus Noblelight

has many years experience in infrared heating technology, provides advice and individual attention and offers the resources of an applications center for testing. Heraeus Noblelight has the optimum spectrum for each application.


- NIR InfraLight – Halogen infrared emitters
- Twin tube infrared emitters in all conventional wavelengths
- CIR® Carbon emitters
- IR modules and control systems for industrial applications
- Emitters for targeted heating in manufacturing processes and for complex surface geometry

Infrared heating technology offers important advantages: Heating only where it is required, with the optimum wavelength for the product to be heated and in harmony with the process.

Heraeus Noblelight

www.heraeus-noblelight.com



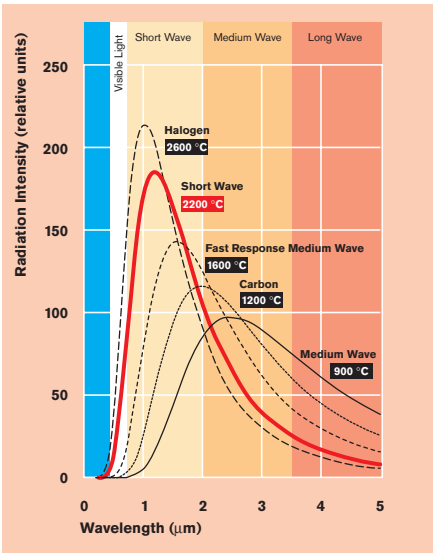

Spectrum of the short wave infrared emitter compared with other Heraeus Noblelight infrared emitters – taken at the same electrical power for all emitter types.


Short wave infrared emitters

- Twin tube emitters, tube format 23 x 11 mm
- Filament temperature 1800 – 2400 °C
- Peak wavelengths 1.2 – 1.4 µm
- Mean power density 70 W/cm
- Maximum surface power approx. 200 kW/m²
- Standard emitters are designed for horizontal operation. The emitters are modified for vertical operation.
- Emitters are available in different designs and can be one-side or two-side connected.
- A gold coating of the emitter ensures that the effective radiation is virtually doubled.



Radiation field of short wave infrared emitters. As well as emitters and emitter fields, Heraeus Noblelight also offers SYS series electronic controllers and Heratron power controllers.

Standard designs for infrared twin tube emitters, with one-side (A,B) or two-side (C,D,H) connections, others on request.

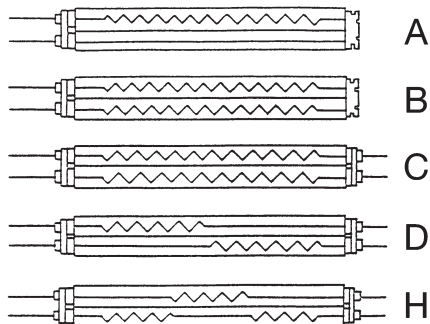

Short Wave Standard Emitters


Emitter one-side connection, design B

Total Length GL [mm]	Heated Length BL [mm]	Voltage [V]	Power [W]
145 – 285	80 – 220	115	400 – 1400
165 – 465	100 – 400	230	900 – 3000
265 – 765	200 – 700	400	1400 – 5100
265 – 965	200 – 900	480	1400 – 6100

Emitter two-side connection, design C

Total Length GL [mm]	Heated Length BL [mm]	Voltage [V]	Power [W]
170 – 480	90 – 400	115	700 – 3000
280 – 880	200 – 800	230	1400 – 6000
480 – 1580	400 – 1500	400	2400 – 10400
480 – 1880	400 – 1800	480	2900 – 12500

Heraeus manufactures short wave emitters in other designs, lengths, voltages and power intensities to meet the individual requirements of your manufacturing process.

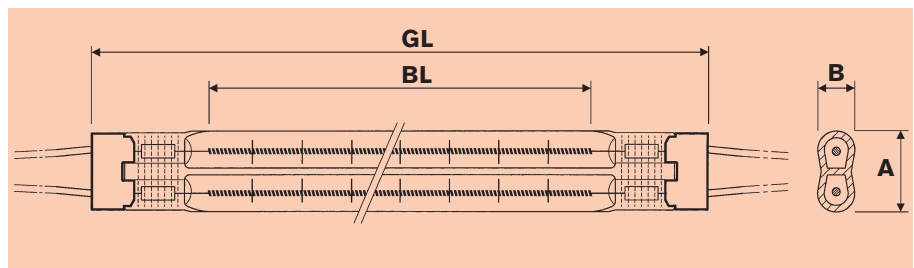

We reserve the right to change the pictures and technical data of this brochure.

Printed in Germany HNG - B 28 E 5C 04/03/M+T



Heraeus Noblelight GmbH
 Reinhard-Heraeus-Ring 7
 D-63801 Kleinostheim
 Germany
 Phone +49 (6181) 35-8545
 Telefax +49 (6181) 35-168410
 hng-infrared@heraeus.com
 www.heraeus-noblelight.com

Heraeus Noblelight Ltd.
 8, Caldbeck Road
 Bromborough, Wirral
 Merseyside CH62 3PL/England
 Phone +44 (151) 343 0545
 Telefax +44 (151) 343 9883
 hnl-bromborough@heraeus.com
 www.heraeus-noblelight.com

Heraeus Noblelight, Inc.
 2150 Northmont Parkway, Suite L
 Duluth, GA 30096
 USA
 Phone +1 (770) 418-0707
 Telefax +1 (770) 418-0688
 info@noblelight.net
 www.noblelight.net



Reg. No. 39254