

Fulflo® TruBind™ 400 Series


Absorbent Cartridge Series

Effective and Economical Hydrocarbon Removal with Enhanced Polymeric Absorbent Cartridges

Parker Fulflo® TruBind absorbent cartridges utilize a modified polymeric absorbent that economically and effectively reduces trace hydrocarbon contamination in aqueous fluids. The enhanced polymer, configured in a radial-flow-design cartridge, provides maximum utilization of available surface area. This product can be used alone or as an enhancement to other systems. Whether process fluid reclamation or meeting disposal requirements is the goal, TruBind can solve many demanding hydrocarbon-contaminated aqueous fluid problems.

Applications

- Water Soluble Machine Tool Coolants
- Alkaline Parts Washing
- Industrial Discharge Water
- Produced Water Disposal
- Injection Molding Cooling Water
- E-Coat Paint
- Pre R.O. Membrane
- Tanker Ballast Water
- Aerosol Mists
- Plating Bath
- Leisure/Commercial Shipping Bilge Water
- Surface Water Runoff (Truck stops, airports, auto service stations)
- Gas & Oil Facility Wastewater
- Car & Truck Wash Water
- Compressor Condensate
- Post Oil/Water Separator Polishing
- Floor Scrubbing Waste Water
- Pre Carbon Bed

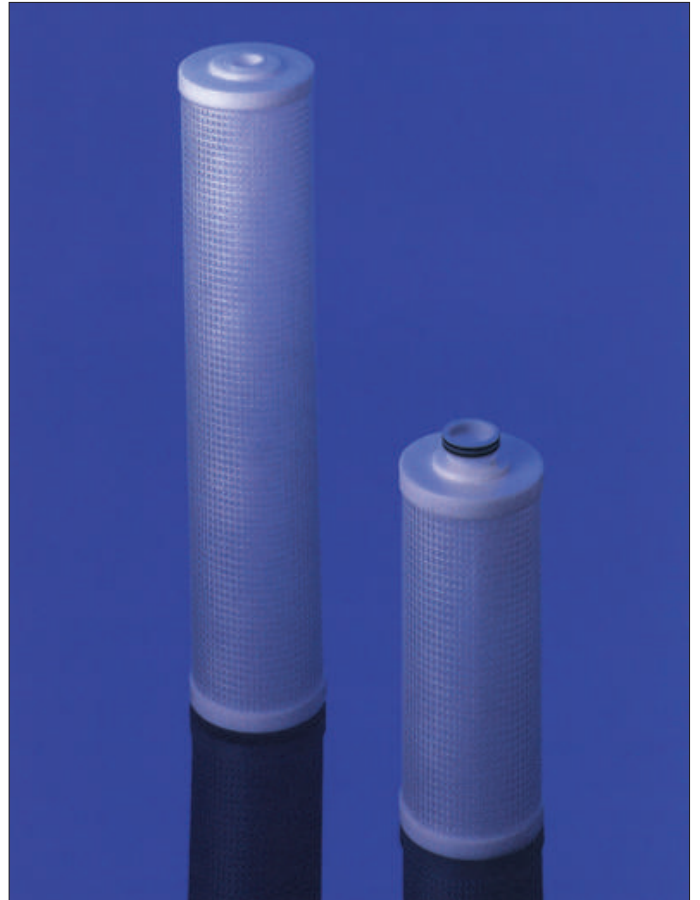

Features and Benefits

- Increases machine tool life when installed at point-of-use.
- Increases working life of valuable process fluids.
- Reduces hydrocarbon levels to meet EPA discharge regulations.
- Absorbed hydrocarbon is chemically bound by polymer and is not leachable.
- Absorbent polymer is enhanced to maximize utilization of surface area.
- Radial flow design of cartridge allows maximum flow with minimal pressure drop.
- High integrity construction withstands harsh process environment.
- "400" Series fits Parker LTG Vessels and similar competitive vessels.
- TruBind cartridges are completely incinerable.
- Parker's TQM system assures consistent and reliable performance.

Process Filtration Division

WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



Absorbent Series

Technology

Unlike competitive technologies in which hydrocarbons are removed through surface adsorption onto the medium, TruBind cartridges utilize a proprietary modified polymer that both absorbs and binds the hydrocarbon molecules into its interior matrices. The affinity of the polymeric absorbent for hydrocarbon contaminant is so great that accelerated testing by the Toxic Characteristics Leachate Procedure (TCLP) indicated the effluent hydrocarbon level in water to be below current and proposed EPA

limits. The modified polymer was formulated to control the speed of hydrocarbon absorption by eliminating the potential for skin formation at the polymer/hydrocarbon interface. Consequently this polymer, when incorporated into a radial-flow-design cartridge, insures maximum utilization of surface area. The nature of the polymer makes it an effective absorbent of free, emulsified and dissolved oils, synthetic lubricants, grease and a multitude of organic solvents.

Performance

TruBind absorbent cartridge efficiency depends upon the residence time of the fluid within the cartridge, which is a function of the volumetric flow rate.

1. Hydrocarbon Removal Efficiency: At an equivalent flow rate of 11.36 l/min per 25.4mm cartridge the TruBind cartridge typically reduces trace hydrocarbon contaminant in excess of 95% in single pass mode. This efficiency level can be maintained only to a net differential pressure of 0.7 bar. Series or multipass filtration can virtually eliminate hydrocarbon contamination.

2. Hydrocarbon Absorbent Capacity: The TruBind cartridge medium has the potential to remove up to 500 grams (approximately one pint) of low density hydrocarbon contaminant. On this basis, the table below provides expected life data in hours or gallons at several trace contaminant levels based on a 11.36 l/min flow rate per 254mm cartridge. Absorbent capacity will decrease as density of hydrocarbon increases.

3. Flow Rate Capability: A maximum flow rate of 11.36 l/min per 254mm length cartridge is recommended for the most effective removal of trace hydrocarbon contaminant.

| Hydrocarbon Concentration | | Hydrocarbon Removal per Minute (grams) | Estimated Life in Hours | Litres Fluid Treated |
|---------------------------|---------------|--|-------------------------|----------------------|
| (ppm) | (% by Weight) | | | |
| 10 | .001 | 0.11 | 80.0 | 54,504 |
| 100 | .01 | 1.10 | 8.0 | 5,300 |
| 1,000 | .1 | 11.00 | 0.8 | 545 |

Specifications

Materials of Construction:

- Absorbent: Proprietary polymer
- Support Construction: 100% polyolefin
- Seal Material: Gasket (Polyethylene Foam); 222 O-Ring (Buna-N)

Cartridge Dimensions (nominal)

- Lengths: 9 13/16 in (249mm); 19 15/16 in (506mm)
- Outside Diameter: 4 1/4 in (108 mm)
- Inside Diameter: 1-1/16 in (27 mm)

Maximum Recommended Operating Conditions:

- Temperature: 150°F (65°C) @ 20 psid (1.4 bar)
- Pressure: 40 psid (4.1 bar) @ 75°F (24°C)
- Flow Rate: 11.36 l/min per 254mm cartridge
- Changeout Pressure Drop (net): 10 psi (0.7 bar)
- Flow Factor: 0.1 psid per 1 gpm at 1 cks viscosity per 10 in cartridge

Recommended pH Range:

- pH 2 -12

Recommend Vessels:

- Parker LTG10 and LTG 20 Polymeric Vessels

BioSafety:

- The TruBind cartridge is classified as non-hazardous and incinerable. Disposal must be dictated by local regulations pertaining to the absorbed contaminant.

Consult factory for special product configurations.

Ordering Information

| | | | | | |
|-----------------------------|--------------------------|---|--------------------------------------|--|---|
| TBC | 4 | 10 | A | TC | A |
| Cartridge Series | Outside diameter | Cartridge Length | Support Core | Cartridge Seal Design | End Seal Options |
| TruBind Absorbent Cartridge | Code in mm 4 41/4 108 | Code in mm 10 9-13/16 249 20 19-15/16 506 | A = Standard Wall Polypropylene Core | DO = Double-Open-End (gasket seal) TC = Single-Open-End (222 O-ring seal) | A = Polyolefin Foam Gasket (standard for "DO" seal design) N = Buna-N O-Ring (standard for "TC" seal design) |

Example:
TBC410A-DO-A

Process Filtration Division

Parker Filtration
Filter Division Europe
Shaw Cross Business Park
Dewsbury, West Yorkshire
WF12 7RD, England
Phone: +44 (0) 1924 487000
Fax: +44 (0) 1924 487001
Website: www.parker.com

