

Fulflo® LT Series Single Cartridge Vessels

n SAN/Polypropylene

Single Cartridge Filter Vessel Series

Fulflo^Æ Polymeric Vessels for Water Filtration

Parker Fulflo LT Series Polymeric Vessels are an ideal economical choice for low flow industrial and potable water applications. Standard and large diameter vessels accommodate 2-1/2 and 4-1/2 inch O.D. double-open-end Fulflo cartridges and meet FDA requirements for use with potable fluids. Both 10-in and 20-in vessels, with or without pressure relief vent, are available. Installation wrenches and brackets are optional.

Applications

- n Potable Water
- n Beverages
- n Bottled Water
- n DI Water
- n Food Products
- n Process Water
- n Alkaline Parts Washing
- n Compressor Condensate
- n Industrial Discharge Water
- n Leisure/Commercial Shipping Bilge Water
- n Post Oil/Water Separator Polishing



Features and Benefits

- n Fulflo® polymeric vessels are available in two diameters and lengths, with or without relief vent.
- n The all-polymeric, corrosion-resistant LT series vessels are economical alternatives to stainless steel vessels when high temperature and high pressure are not specified.
- n All models are made of materials that meet FDA requirements.
- n The LTG model vessels provide both 1 in and 1-1/2 in NPT connection in same head.
- n Positive head-to-shell "stop" prevents over tightening.
- n Unique o-ring design ensures effective sealing by positive tangential contact and eliminates accidental misplacement.
- n LT model vessels are ideal for Fulflo bonded, pleated and wound cartridges, as well as activated carbon core models MMCT-10 and MC10-2.
- n LTG model vessels are ideal for Fulflo TruBind 400 series cartridges and 4-1/2 in O.D. wound cartridges.
- n Optional installation wrenches accommodate faster cartridge changeout.
- n Mounting brackets are available for pipe and wall installation.
- n LT series vessels are tested to industry standards of Water Quality Association for burst pressure, seal integrity, and fatigue resistance.

Process Filtration Division

Specifications

Materials of Construction:

- n White talc-reinforced polypropylene head with clear styrene acrylonitrile (SAN) shell.
- n Head-to-shell o-ring:
LT model: 2-240 Buna N
LTG model: 2-358 Buna N

Recommended Operating Conditions:

- n Maximum operating temperature:
125°F. (52°C)
- n Maximum operating pressure:
LT: 150 psi. LTG: 125 psi.
- n Maximum recommended flow rate:
LT10: 6 gpm (23 lpm)
LT20: 12 gpm (45 lpm)
LTG10: 10 gpm (38 lpm)
LTG20: 20 gpm (76 lpm)

Connection Dimensions:

- n LT: 3/4 in NPTF
- n LTG: 1 and 1 1/2 in NPTF (dual connection)

Accepts Industry Standard Cartridge


Sizes (Nominal):

- n I.D. 1 1/16 in (27mm)
- n O.D. LT: 2 1/2 in (64 mm)
LTG: 4 1/2 in (114mm)


n Lengths:

9 13/16 in (249 mm); 20 in (508 mm)

Dimensions: LT Model

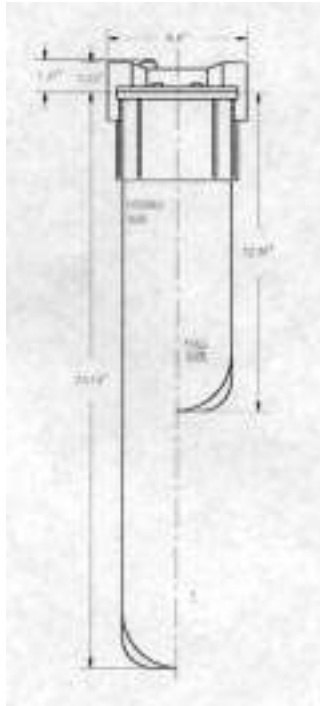

Dimensions: LTG Model

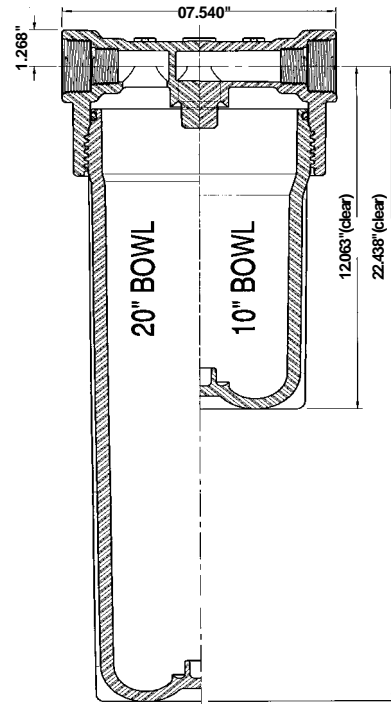

n Available Options for LT Model

Option	Part Number
Wrench for 10 in Shell	6880-1-005
Wrench for 20 in Shell	6880-1-010
L-Bracket—Wall Mount	0820-6000
U-Bracket—Pipe Mount	0820-5536

n Available Options for LTG Model

Wrench for 10 in Shell	6880-6000
Wrench for 20 in Shell	6880-6001
L-Bracket—Wall Mount	0820-6001

n Available Vessel Part Numbers

LT Model	LTG Model
LT10	LTG10
LT10V	LTG10V
LT20	LTG20
LT20V	LTG20V

Ordering Information

LT	10	V
Series	Vessel Length (in)	Vent (in)
LT=Vessel for nominal 2 1/2 in O.D. cartridges	10 = 10 20 = 20	No Symbol = No Vent V = Vent

LTG=Vessel for nominal 4 1/2 in O.D. cartridges

Process Filtration Division

Parker Hannifin UK Ltd
Filter Division Europe
Shaw Cross Business Park
Dewsbury, West Yorkshire
WF12 7RD, England
Phone: +44 (0) 1924 487000
Fax: +44 (0) 1924 487001
Website: www.parker.com

Filtration