


FILTERNOX SFH 1013 FILTER LAYOUT AND DIMENSIONS

DRAINAGE
R 1½" (DN 40)
BSP-Female threaded

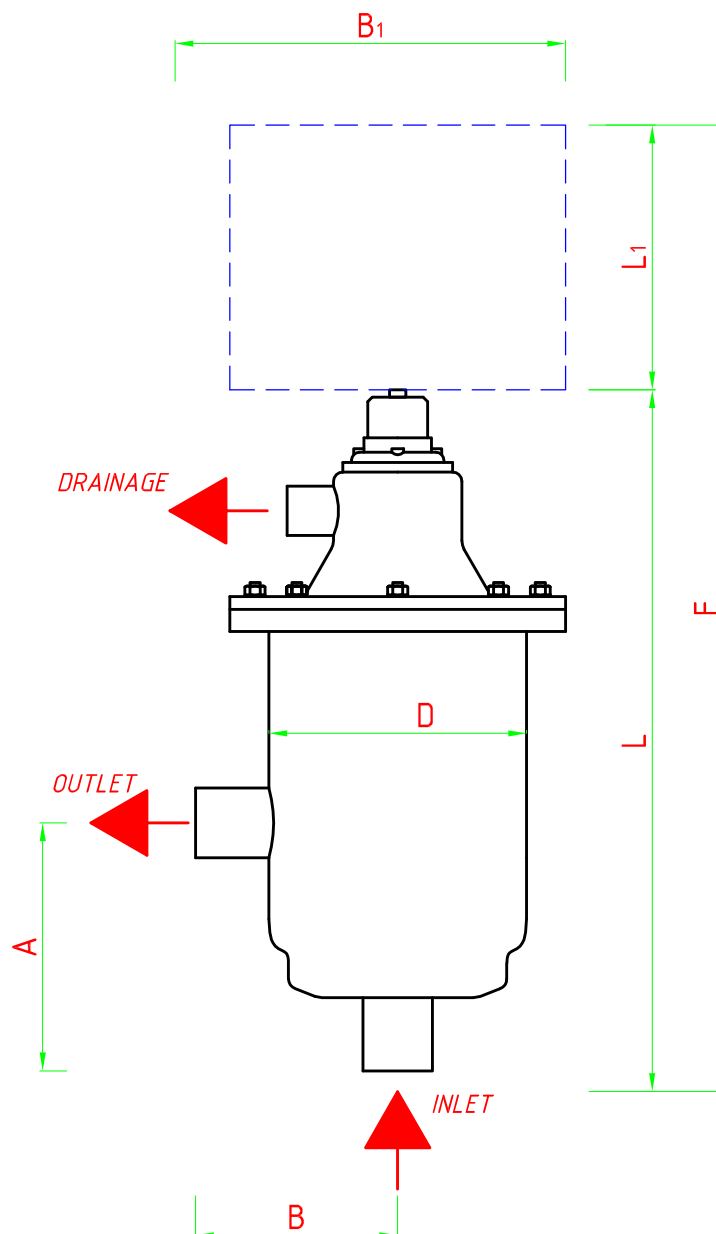

Body Material:	AISI 304
Screen Material:	AISI 316
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During back-flush:	2 bar
Max. Operating Temperature:	55 °C
Pressure Loss at Max. Flow Rate:	0.2 bar
Approximate back-flush Time:	10-15 sec. max.
Approximate back-flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electrical

For high pressure, high temperature and different materials, custom made filters can be produced.

Free space for maintenance

SFH 1013	CONNECTION	INLET/OUTLET		A	B	B ₁	L	L ₁	F	D	WEIGHT(kg)		MAX. FLOW RATE	SCREEN AREA
		inch	mm								FULL	EMPTY		
	THREADED	3	80	280	200	362	750	260	1010	10"	55	30	40	1080

All dimensions are in millimeters.

Filternox[®]
AUTOMATIC SELF-CLEANING FILTER

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.