



FILTERNOX SFH 1014 FILTER LAYOUT AND DIMENSIONS

DRAINAGE
R 1½" (DN 40)
BSP-Female threaded

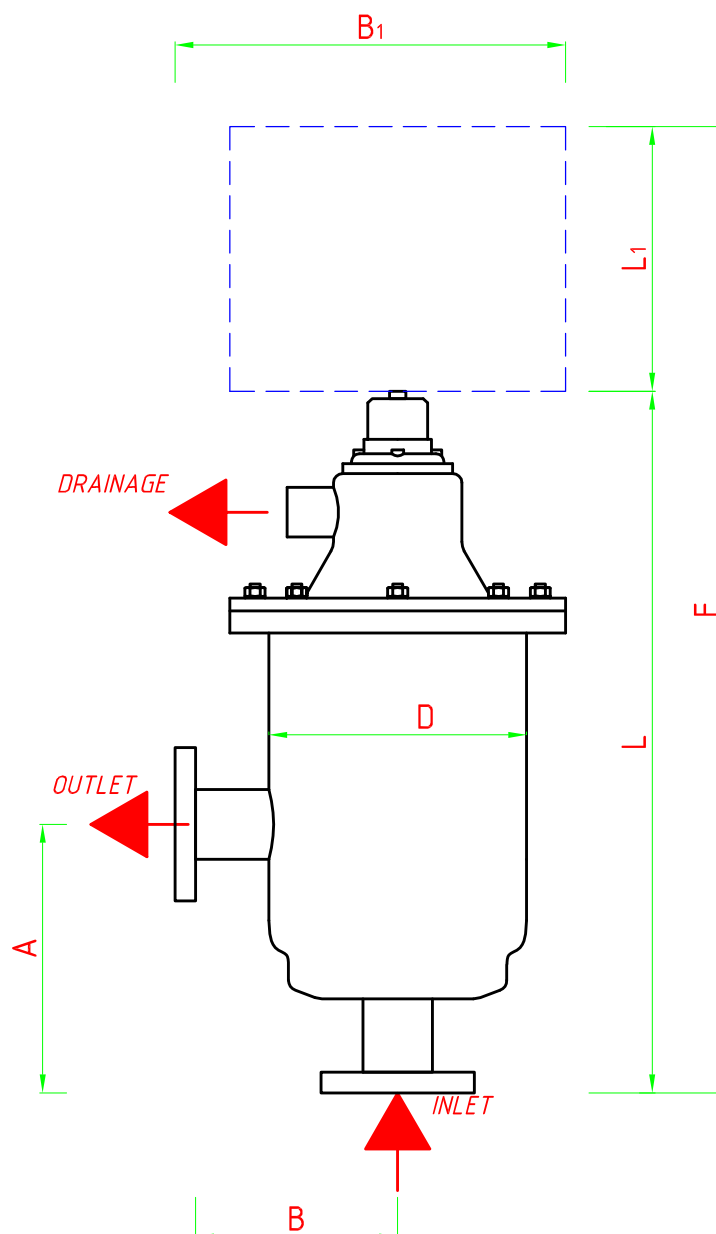

Body Material:	AISI 304
Screen Material:	AISI 316
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During back-flush:	2 bar
Max. Operating Temperature:	55 °C
Pressure Loss at Max. Flow Rate:	0.2 bar
Approximate back-flush Time:	10-15 sec. max.
Approximate back-flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electrical

For high pressure, high temperature and different materials, custom made filters can be produced.


 Free space for maintenance

SFH 1014	CONNECTION	INLET/OUTLET		A	B	B ₁	L	L ₁	F	D	WEIGHT(kg)		MAX. FLOW RATE	SCREEN AREA
		inch	mm								FULL	EMPTY		
	FLANGED	4	100	310	232	394	775	260	1035	10"	60	35	80	1080

All dimensions are in millimeters.


 AUTOMATIC SELF-CLEANING FILTER

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.